



Product Highlights

- Design base on concept of traditional mold tuning machines
- Rotation driven by mechanical cogs via hydraulic pressure
- Low working table
- Compact size
- Safe and reliable

Operating Flow

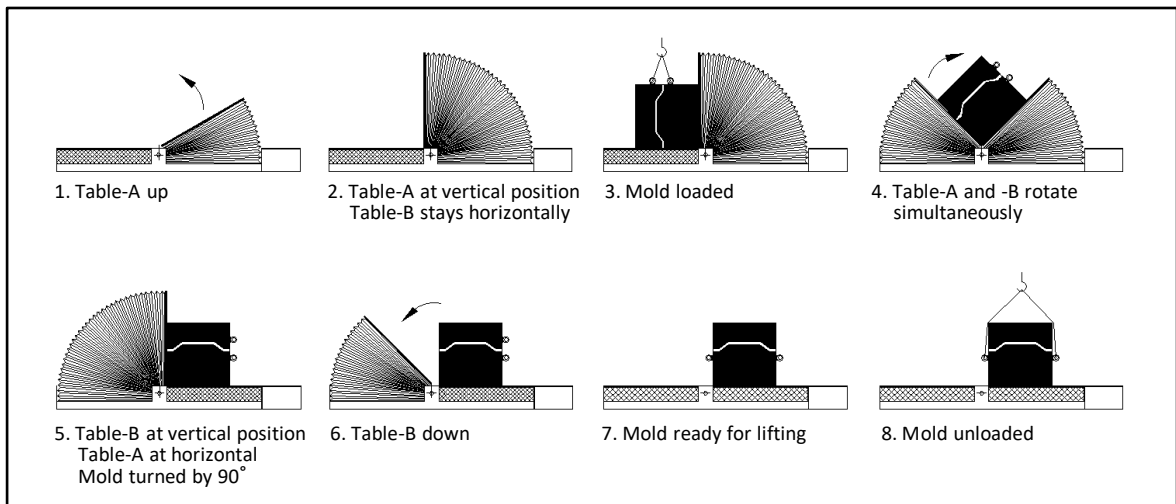

Dimensions

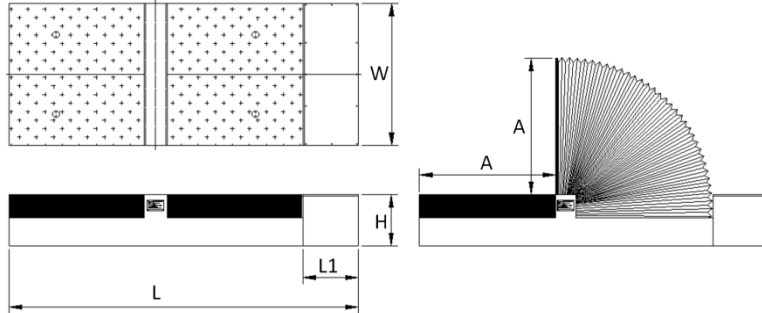

	L (mm)	L1 (mm)	W (mm)	H (mm)	A (mm)
PMF-5	3280	900	1250	300	1100
PMF-10	3850	900	1400	400	1200
PMF-15	3930	900	1600	470	1400
PMF-30	5150	900	2000	570	2000
PMF-50	7000	1360	2600	800	2600

Specification

	PMF-5	PMF-10	PMF-15	PMF-30	PMF-50
Bolster area (mm)	1250 x 1100	1400 x 1200	1600 x 1400	2000 x 2000	2600 x 2600
Bolster height (mm)	300	400	470	570	800
Maximum turning force (t)	5	10	15	30	50
0-90° turning time (s)	20	25	30	40	150
Motor power (kW)	5.5	7.5	11	15	18.5
Dimensions (mm)	3280 x 1250 x 300	3850 x 1400 x 400	3930 x 1600 x 470	5150 x 2000 x 570	7000 x 2600 x 800
Weight (t)	2	4	6	11	18
Hydraulic tank capacity (l)	50	50	85	160	400

* Above technical parameters are for reference only and are subjected to the actual device.

Dongguan City AQUAmate Machinery Co., Ltd. reserves the rights of final interpretation and revision.

CONTACT

Welteck Machinery Company
Unit 2301-02, Prosperity Center,
25 Chong Yip Street, Kwun Tong,
Hong Kong
Tel : (852) 2756 6331
Fax : (852) 2756 5522
Email : info@welteck.com
www.welteck.com

